


ANRIN

LEADING WATER

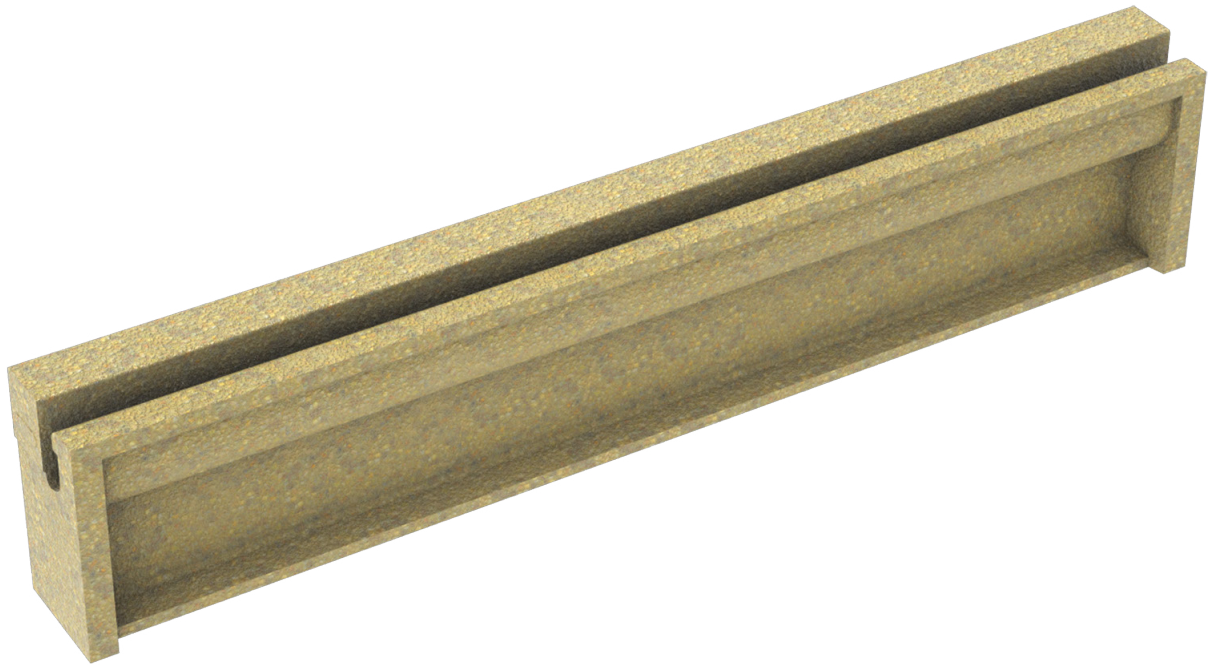

Technical data sheet

Clamp stone
for edging of synthetic turf
playing fields
in combination with pavement,
edge blocks or channels

Technical data sheet

ANRIN SPORT Clamp stone

for edging of synthetic turf playing fields

in combination with pavement, edge blocks or channels

With the ANRIN SPORT clamp stone made of resin concrete and the ANRIN SPORT clamp rail made of galvanised steel, two highly-functional and easy-to-install clamping systems are available for the edging of traditionally installed synthetic turf.

In the process, the synthetic turf is aligned with the corresponding gripper rail in the clamping slot and fixed in place by driving in the synthetic wedge. The clamp stone and clamp rail are suitable for combination with pavers, edge plates and drainage channels. The installation takes place in a concrete foundation.

Product specifications

Product specifications		Clamp stone with 5 cm concrete edge
Material		Resin concrete
Length		100 cm
Width		10.0 cm
Height		20.0 cm
Weight		21.1 kg

Material properties

Channel / component body	
Polymer concrete	polyester resin-based with mineral aggregates, additives
Compressive strength	$\geq 90 \text{ N/mm}^2$
Bending tensile strength	$\geq 22 \text{ N/mm}^2$
Modulus of elasticity	ca. 25 kN/mm^2
Density	$2.1 - 2.3 \text{ g/dm}^3$
Heat resistance	100° C (permanent loading)
Frost resistance	$- 50^\circ \text{ C}$
Water penetration depth	0 mm
Water absorption	0.05 %

Technical data sheet

ANRIN SPORT Clamp stone

for edging of synthetic turf playing fields
in combination with pavement, edge blocks or channels

Areas of application



Areas of application

for rectangular synthetic turf playing fields with even-level auxiliary surfaces

Clamp stone and clamp rail

Article no.	EAN	Designation	Length cm	Width cm	Height cm	Weight kg
04435003	4026857027171	Clamp stone with 5 cm concrete edge	100	10.0	20.0	21.1

Example installations

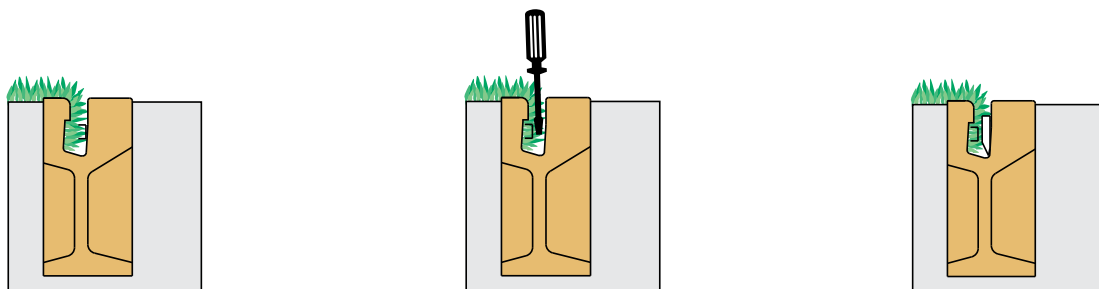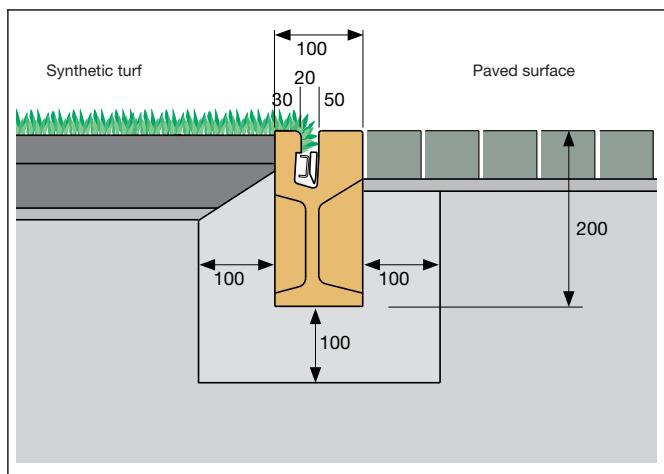

1. Den Saum des Kunstrasens beschneiden und in den Klemmschlitz (a) einlegen.
2. Die Greifschiene (b) mit den kurzen Schenkeln zum Kunstrasen gerichtet in den Klemmschlitz eindrücken, bis die Oberkante mit der Einführschräge am Klemmstein abschließt.
3. Mit einem Schraubenzieher hinter die Greifschiene stecken und durch drehen der Klinge die Greifschiene nach vorne pressen.
4. Anschließend den Keil (c) mit der Schräge zum Kunstrasen gerichtet mit Hilfe des Eintreibwerkzeuges hinter der Greifschiene fixieren.



ANRIN GmbH
Siemensstr. 1
59609 Anröchte
Germany

+49 (0) 29 47.97 81-0
www.anrin.com
info@anrin.com